




MAUSER
S P E Z I A L


MA1295/1296

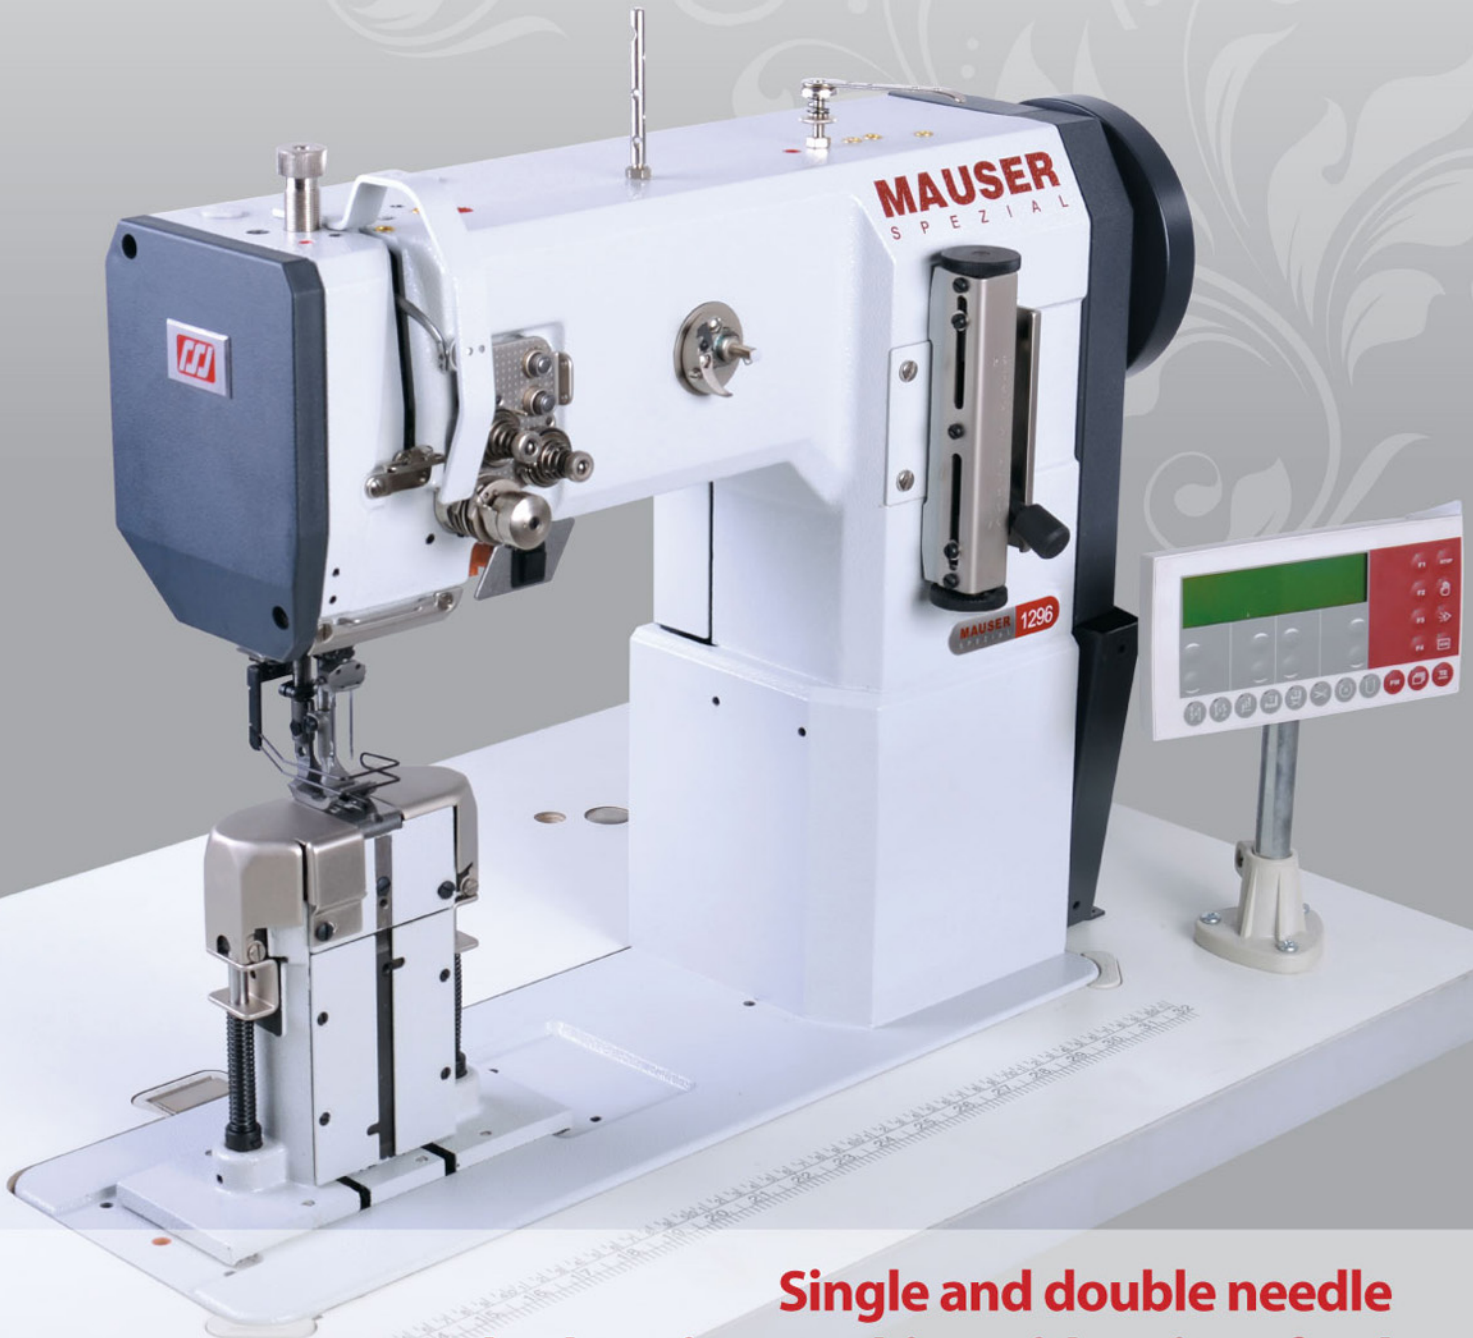

**Single and double needle
post-bed sewing machine with unison feed**

MA1295/1296

Single and double needle post-bed sewing machine with unison feed

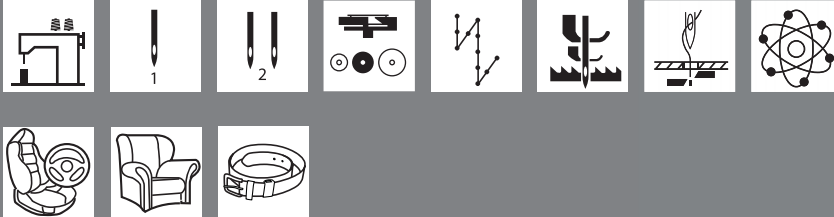


SPECIAL FEATURES

- Unobstructed view of the stitching area
- The post-bed design is ideal for handling shaped parts before or after they are closed
- Trouble-free stitching over cross-seams with no difference in stitch length, due to the alternating top feed with 7 mm stroke
- Accurate and consistent stitch formation on all materials, up to thread sizes of 15/3-ply, synth.
- Uncomplicated mechanical system guarantees perfect function
- Built-in bobbin winder within operator's view
- Large vertical hook with 60% more thread capacity than conventional hooks
- Protection of the hook against thread jamming by built-in and easy-to-handle overload clutch as standard equipment
- High sewing output and easy operation due to time- and cost-saving work aids, such as:
 - Thread trimmer
 - Automatic presser foot lift
 - Back tacking mechanism
 - Needle positioning mechanism
- Large fabric clearance of 14 mm for easier loading and removal of the work piece
- As an alternative available with a long stitch (up to 11 mm) for rustic stitching

AREAS OF APPLICATION

Sewing of medium-heavy materials, e.g. furniture and car upholstery, leather clothing, leather goods, etc.

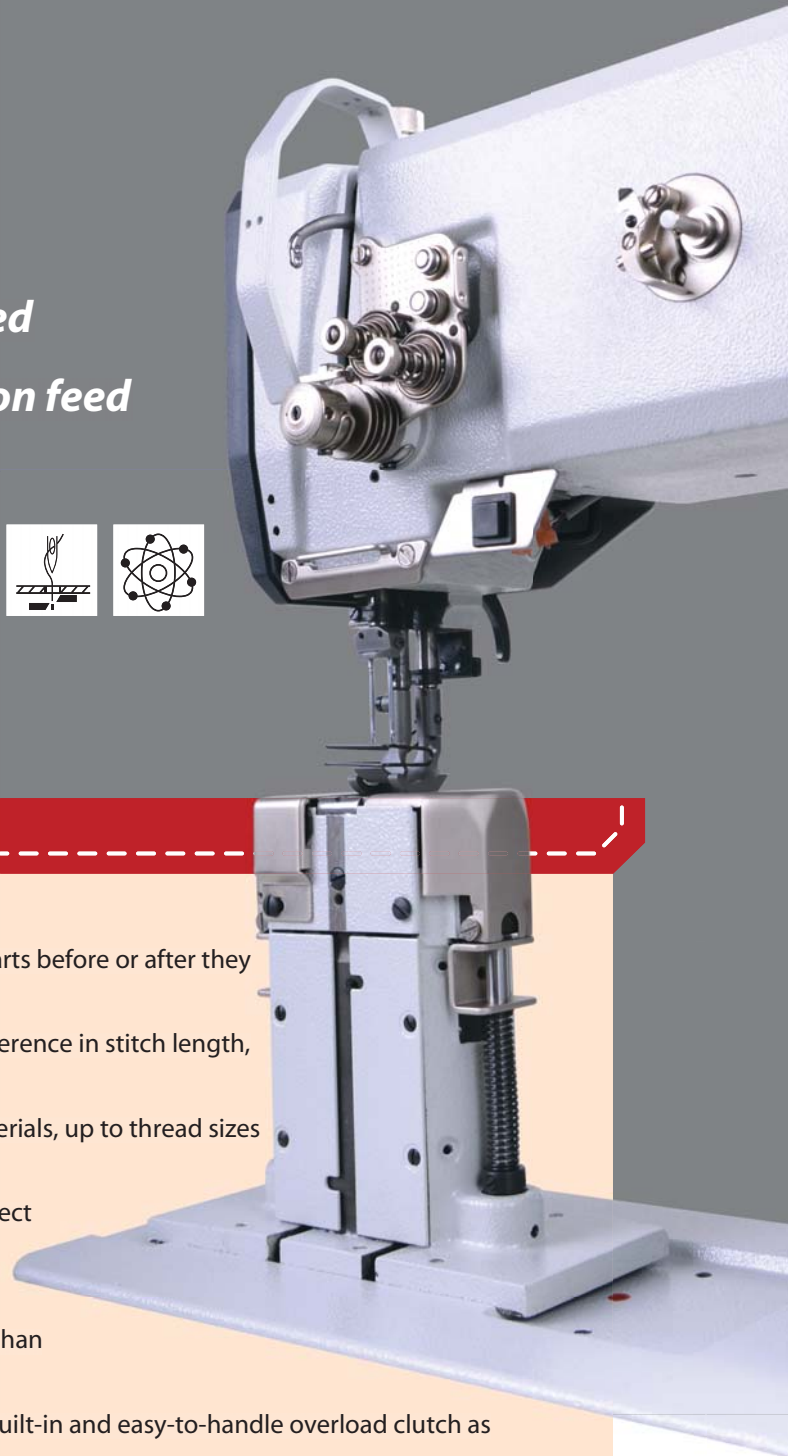

SUBCLASSES & WORK AIDS

- 6/01 For plain seaming operations
- 17/01-940/01 Part set for binding, with balcony shaped needle plate for sewing convex-shaped work pieces (Binding attachment required as extra)
- 63/14 Fancy- and top-stitching operations, also on one-sided bulky cross-seams; compensating presser with seam guide, tape guide from below
- 63/15 Fancy- and top-stitching operations, also on one-sided bulky cross-seams; compensating presser, pneumatically operated, engageable middle seam guide and tape guide from below
- 900/56 Thread trimmer
- 911/97 Automatic presser foot lift and back tacking (a pneumatic air filter / regulator is required)

TECHNICAL DATA

Stitch type	301 (lockstitch)
Max. sewing speed	1295: 1,900 s.p.m 1295-6/37: 2,200 s.p.m 1296: 1,800 s.p.m
Fabric clearance	14 mm
Top feed Stroke	7 mm
Needle Size	110-180
Needle system	134-35
Usable thread size	15/3-ply
Model	C
Clear workspace	270 x 270 mm
Motor	0.55 kW
Bedplate dimensions	518 x 177 mm
Net weight	approx. 56 kg
Gross weight	approx. 64 kg
Carton dimensions	80 x 71 x 31 cm
Effective balance wheel dia.	90 mm

This machine is equipped with finger-guard, belt- and take-up lever guards as standard.



Standard Supply Program	Thread trimmer -900/56	Automatic presser foot lift and backtacking -911/97	Four-motion drop feed	Needle gauge
1295-6/01 CLMN				
1295-6/01 CLPMN			●	
1295-6/01-900/56 CLMN	●			
1295-6/01-900/56 CLPMN	●		●	●
1295-6/01-900/56-911/97 CLPMN	●	●	●	
1295-17/01-650/03-940/01 CLMN				
1295-6/01-911/97 CLPM N11		●	●	
1296-6/01 CL x 3.2 PMN			●	3.2
1296-6/01 CL x 6.0 MN				6.0
1296-6/01 CL x 10.0 MN				10.0
1296-6/01 CL x 10.0 PMN			●	10.0
1296-6/01-900/56 CL x 3.2 PMN	●		●	3.2
1296-6/01-900/56-911/97 CL x 3.2 MN	●	●		3.2
1296-6/01-900/56-911/97 CL x 4.8 PMN	●	●	●	4.8
1296-6/01-900/56-911/97 CL x 6.0 PMN	●	●	●	6.0
1296-6/01-900/56 CL x 10.0 MN	●			10.0
1296-6/01-900/56 CL x 10.0 PMN	●		●	10.0
1296-6/01-900/56-911/97 CL x 10.0 MN	●	●		10.0
1296-63/14-900/56 CL x 8.0 PMN	●		●	8.0
1296-63/15-900/56-911/97 CL x 6.0 MN	●	●		6.0
1296-63/15-900/56 CL x 8.0 MN	●			8.0
1296-63/15-911/97 CL x 10.0 PM N11		●	●	10.0
1296-63/15-911/97 CL x 12.0 PM N11		●	●	12.0

C =For medium to heavy materials

L =Leather

S =Fabric

M=Overload clutch for protection of the hook

N=Max. stitch length 6mm (forward / reverse)

P =Four-Motion-Drop-Feed

German Headquater

Tribonia Intl.

GmbH Taunusstraße 5, 65183 Wiesbaden, Germany



Mauser Spezial

Pfaff Industrial (Taicang) Co., Ltd.

A20 Foreign Industrial Park No. 105 East Shanghai Road

215400 Taicang, Jiangsu, PRC

Int'l Tele: +86 512 5328 3297

Hot Line: (0512) 5328 3224

www.mauser-spezial.com

info@mauser-spezial.com